



Working Height Max.

16 m (52'6")

8 m (26'3")

Overall Lift Capacity Max.

350 kg (771 lb)

Overall Width

1.38 m (4'6")

Overall Length

3.1 m (10'2")




Overall Weight

3,800 kg (8,377 lb)

LS1414E

Electric Scissor Lift E-Drive

LS1414E SPECIFICATIONS >>>

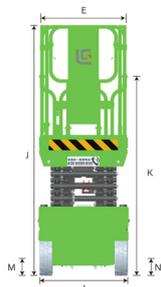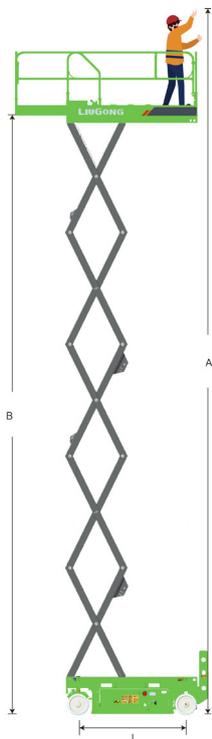

DIMENSIONS

A. Working Height Max. (Indoor/Outdoor)	16 / 8 m (52'6" / 26'3")
B. Platform Height Max. (Indoor/Outdoor)	14 / 6 m (45'11" / 19'8")
C. Platform Height (Stowed)	1.66 m (5'5")
D. Platform Length	2.88 m (9'5")
E. Platform Width	1.35 m (4'5")
F. Extension Deck (Roll Out)	1.22 m (4')
G. Overall Length	3.1 m (10'2")
H. Overall Length (Without Ladder)	2.9 m (9'6")
I. Overall Width	1.38 m (4'6")
J. Stowed Height (Rails Up)	2.74 m (8'11")
K. Stowed Height (Rails Down)	1.97 m (6'6")
L. Wheelbase	2.5 m (8'2")
M. Ground Clearance (Pothole Raised)	150 mm (6")
N. Ground Clearance (Pothole Deployed)	20 mm (0.8")

PRODUCTIVITY

Overall Lift Capacity Max.	350 kg (771 lb)
Extension Deck Capacity	136 kg (299 lb)
Platform Occupancy Max. (Indoor/Outdoor)	3 / 2
Drive Speed (Stowed)	4 km/h (2.5 mph)
Drive Speed (Raised)	0.7 km/h (0.4 mph)
Turning Radius (Inside/Outside)	0.3 / 3.12 m (12" / 10'3")
Lift/Lower Time	90 / 60 s
Gradeability	25 %
Tilt Sensor Activation	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	381 x 127 mm (1'3" x 5")

POWER

Battery	24 V / 270 Ah
Lithium Battery (Optional)	24 V / 230 Ah
Charger	24 V / 30 A
Lift Motor	24 V / 3.3 kW
Drive Motor	24 V / 0.7 kW
Hydraulic System Volume	25 L (6 gal 4 pt)
Hydraulic Tank Capacity	20 L (5 gal)

WEIGHT

Overall Weight	3,800 kg (8,377 lb)
----------------	---------------------